



9/07/16

Village of Celoron Lucille Ball Memorial Park Sea Wall and Boardwalk Phase 1

Addendum #2


The attention of all bidders is directed to the following changes to the contract documents in response to a Request for Information regarding Item 203.99870017 as it relates to the stone columns.

1. Attached the soils boring log B-1 which is provided for information purposes only.
2. Blended NYSDOT No.1 & No.2 Stone is acceptable backfill for the stone columns.
3. The Specification identifying 3.5 ft. average effective diameter for the stone aggregate piers governs.
4. The intent of the design of the aggregate columns is to bear on the clayey silt layer at a depth of 28 ft.. Field conditions may dictate the need for shorter or longer columns.

GPI
Lucille Ball Memorial Park
Boulevard St
Jamestown, NY



Chautauqua Lake

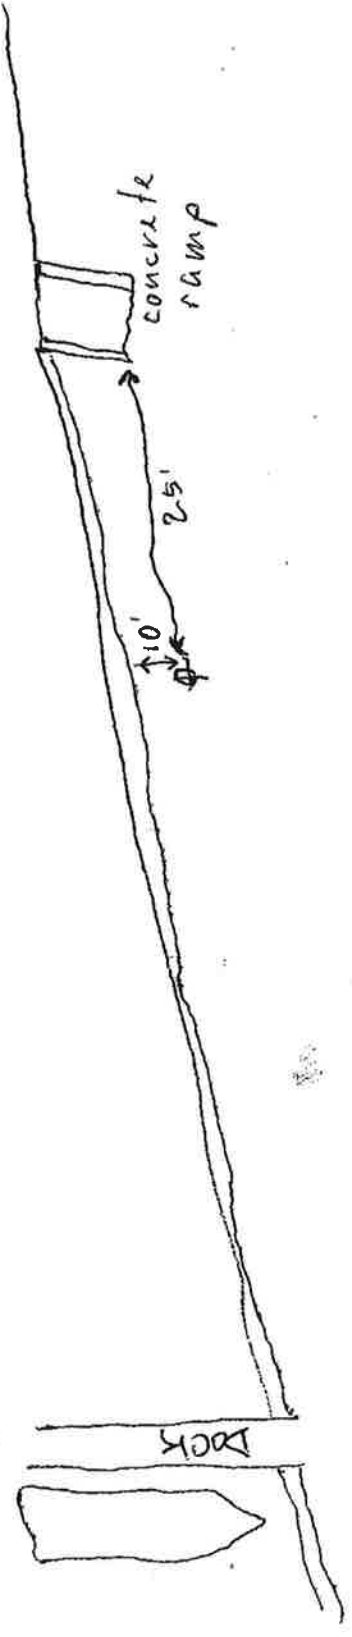

Lucille Ball Memorial Park